



High Port Density, Gigabit Capability and Easy

NETGEAR has packed a lot of value into this high-density switch. Start with high port density in a one unit box, add two Gigabit uplinks to give an added edge to any growing business, then add key switch management capabilities and you have a powerful switch that costs a lot less than you'd expect.

Forty-eight 10/100 Mbps ports and two copper Gigabit Ethernet ports connect to servers or a Gigabit-speed backbone for a non-stop, always-available 10/100/1000 Mbps-enabled network that can quickly deliver large multimedia, image, and video files. All 50 shielded RJ-45 ports automatically negotiate to the highest speed and support Auto Uplink™ technology to make the right link. Two hot-swappable Dual Personality small form-factor pluggable (SFP)** GBIC slots provide optional fiber connectivity for greater distance. Shipped ready to go straight out of the box, it delivers switching that's easy to set up and use.

In addition, an intuitive, Web-browser interface offers the simple Smart Switch management, making it a snap to monitor switch performance, configure ports, even set up port trunks, VLANs, and traffic prioritization. Alternatively, use SNMP-based software to manage your Smart Switch. NETGEAR ProSafe Smart Switches are ideal for adding basic management to your unmanaged networks and extending your managed networks.

Powerful

Forty-eight 10/100 ports and two Gigabit ports deliver non-blocking, full-speed packet forwarding from the edge of your network to the core. Two Dual Personality SFP GBIC fiber slots provide optional fiber connectivity for greater distance.

Intelligent

Smart Switch capability enables the most key management features for the price of an unmanaged switch. Included are performance monitoring, port configuration, VLAN for traffic control, port trunking for increased bandwidth, and Class of Service (CoS) for traffic prioritization.

Right sized


Ideal for growing businesses who want the benefits of management without the cost and complexity of a managed network.

Well designed

LEDs located on the front panel make switch status easy to observe and troubleshooting easy to accomplish. Made to last, this durable switch is housed in a 17-inch metal box and comes with a rack-mounting kit.

**Use with NETGEAR AGM731F 1000BASE-SX SFP GBIC module, NETGEAR AGM732F 1000BASE-LX SFP GBIC module and NETGEAR AGM733 1000BASE-ZX SFP GBIC module.



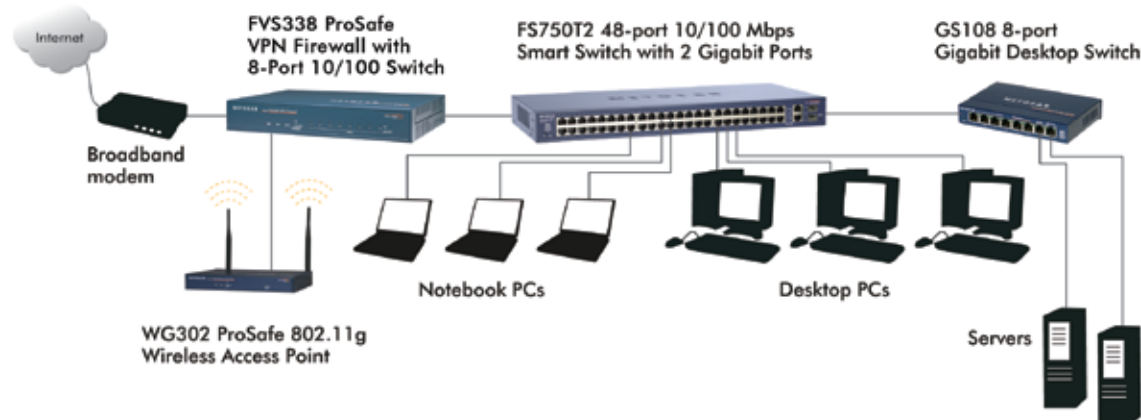

Technical Specifications

• Network Protocol and Standards Compatibility

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3x full-duplex flow control

• Interfaces

- 48 10/100 Mbps auto-sensing Fast Ethernet switching ports
- 2 built-in RJ-45 Gigabit Ethernet ports for 10/100/1000 Mbps connectivity
- 2 Dual Personality SFP slots for fiber Gigabit Ethernet modules

• Port Functions

- Auto-sensing and auto-negotiating capabilities for all ports
- Auto Uplink™ on all ports to make the right connection

• Administrative Switch Management

- IEEE 802.1Q static VLAN (Up to 64)
- Port-based VLAN (Up to 50)
- IEEE 802.1p Class of Service (CoS)
- Port-based QoS
- IEEE802.3ad (manual) link aggregation
- IEEE 802.1D Spanning Tree Protocol
- RFC 1157 SNMP V1 and V2c
- RFC 1213 MIB II
- RFC 1643 Ethernet Interface MIB
- RFC 1493 Bridge MIB
- RFC 2131 DHCP client
- Private Enterprise MIB
- Port mirroring support
- Web-based configuration
- Configuration backup/restore
- Password access control
- Firmware upgradeable
- Fanless – Acoustic Noise 0dB

• Active Flow Control

- Half-duplex back-pressure control
- Full-duplex IEEE 802.3x pause frame flow control

• Performance Specifications

- Forwarding modes: Store-and-forward
- Bandwidth: 13.6 Gbps
- Network latency: Less than 20 microseconds for 64-byte frames in store-and-forward mode for 100 Mbps to 100 Mbps transmission
- Buffer memory: 128 KB
- Address database size: 8,000 media access control (MAC) addresses per system
- Addressing: 48-bit MAC address
- Mean time between failure (MTBF): 59,880 hours (~ 6.8 years)

• LEDs

- Unit: Power
- Per port: Link, activity, speed

• Power Supply

- Power consumption: 21W maximum
- 100-240V AC/50-60 Hz universal input

• Physical Specifications

- Dimensions (H x W x D): 43 x 440 x 205 mm (1.7 x 17.8 x 8.1 in)
- Weight: 3.2 kg (7.0 lb)

• Environmental Specifications

- Operating temperature: 32° to 104° F (0° to 40° C)
- Storage temperature: -4° to 158° F (-20° to 70° C)
- Operating humidity: 90% maximum relative humidity, non-condensing
- Storage humidity: 95% maximum relative humidity, non-condensing
- Operating altitude: 3,000 m

(10,000 ft) maximum

- Storage altitude: 3,000 m (10,000 ft) maximum

• Electromagnetic Compliance

- CE mark, commercial
- FCC Part 15 Class A
- VCCI Class A
- EN 55022 (CISPR 22), EN 55024 (CISPR 24)
- C-Tick

• Safety

- CE mark, commercial
- CUL 60950 (Listed)/ EN 60950 (Low Voltage Directive)

Warranty

- NETGEAR Lifetime Warranty†

System Requirements

- Category 5 UTP network cables or above
- Network card for each PC
- Network software (e.g., Windows®)

Package Contents

- ProSafe 48-port Smart Switch with 2 Gigabit Ports (FS750T2)
- Rubber footpads
- Power cord
- Rack-mount kit
- Smart Switch resource CD
- Smart Switch installation guide
- Warranty/support information card

Modules

- ProSafe AGM731F 1000BASE-SX SFP GBIC
- ProSafe AGM732F 1000BASE-LX SFP GBIC
- ProSafe AGM733 1000BASE-ZX SFP GBIC

Ordering Information

- North America: FS750T2NA
- Europe: FS750T2EU
- Asia: FS750T2AU
- Japan: FS750T2JP

ProSupport Information**• OnCall 24x7, Category 1**

- PMB0331-100 (US)
- PMB0331 (non-US)

• XPressHW, Category 1

- PRR0331

NETGEAR®

4500 Great America Parkway
Santa Clara, CA 95054 USA
1-888-NETGEAR (638-4327)
E-mail: info@NETGEAR.com
www.NETGEAR.com

© 2008 NETGEAR, Inc. NETGEAR, the NETGEAR Logo, NETGEAR Digital Entertainer Logo, Connect with Innovation, FrontView, IntelliFi, PowerShift, ProSafe, RAIDar, RAIDiator, X-RAID, RangeMax, ReadyNAS and Smart Wizard are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved.

*Free basic installation support provided for 90 days from date of purchase. Advanced product features and configurations are not included in free basic installation support; optional premium support available.

†Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 5 years.

D-FS750T2-3