


Duct Cable Specification (Tensile -1500N)

Cable Design

Loose Tube Optical Fiber Cable-Dielectric-Dry Core-G.652D Fiber

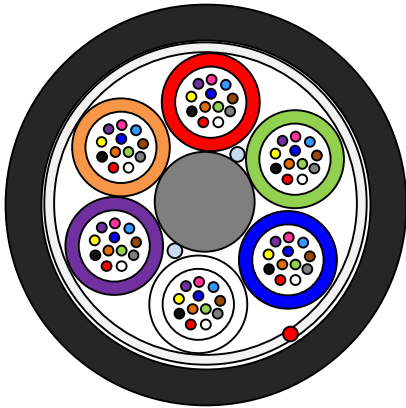

- **Central Strength Member (CSM):** glass fiber reinforced plastic rod (FRP), with PE sheath covering when needed.
- **Loose Tube:** PBT plastic material, containing 12 fibers and filled with a suitable water tightness compound.
- **Filler Elements:** nature PP plastic rods, when needed.
- **Stranding:** loose tubes (and fillers), SZ stranded around the CSM.
- **Longitudinal Water Tightness:** dry core with water swellable elements.
- **Ripcord(s):** 1 polyester ripcord under sheath.
- **Outer Sheath:** Black PE.

Cable Specification

Cable Cores		24	48	72
No. of Tubes		2	4	6
No. of Fillers		4	2	0
Fiber Counts in Tube		12		
Tube/Filler- Φ	mm	1.9		
CSM- Φ	mm	2.0		
Coated CSM- Φ	mm	/		
Thickness of Outer PE Sheath	mm	1.1		
Nominal Cable Diameter	mm	8.0 ± 0.3		
Nominal Cable Weight	Kg/km	52		
Tensile	N	1500		

Cable Application

Temperature Range		Minimum Bend Radius	
Transportation & Storage	-30~+70°C	Load	20×D
Operation	-30~+70°C	Unload	10×D

Main Mechanical and Environmental Characteristics

Test	Test Standard	Specified Value	Acceptance Criteria
Tensile	IEC 60794-1-2-E1	1500N, 1min	$\Delta\alpha$ reversible, fiber strain \leq 0.6 %
Crush	IEC 60794-1-2-E3	1500N/10cm, 1min, 3times	$\Delta\alpha$ reversible, no damage
Impact	IEC 60794-1-2-E4	3J, R=10mm, 3impacts	$\Delta\alpha$ reversible, no damage
Repeated Bending	IEC 60794-1-2-E6	R=20D, 100N, 100cycles	$\Delta\alpha$ reversible, no damage
Bending	IEC 60794-1-2-E11	R=10D, 5turns, 5cycles	$\Delta\alpha$ reversible, no damage
Torsion	IEC 60794-1-2-E7	40N, 5cycles, +/-180°	$\Delta\alpha$ reversible, no damage
Temperature Cycling	IEC 60794-1-2-F1	-20~+70°C, 2cycles, 4h	$\Delta\alpha\leq$ 0.1dB/km, no damage
Water Penetration	IEC 60794-1-2-F5	3m sample, 1m height, 24h	No water leakage

Fiber & Tube Color

Color Identification of Fiber

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Red	Green	Blue	White	Violet	Orange	Grey	Yellow	Brown	Pink	Black	Aqua

Color Identification of Tube

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Red	Green	Blue	White	Violet	Orange	Grey	Yellow	Brown	Pink	Black	Aqua

Cabled Fiber Performance (G.652D)

Characteristics		Acceptance Value
Attenuation	@1310nm	$\leq 0.40\text{dB/km}$
	@1550nm	$\leq 0.30\text{dB/km}$
Mode Field Diameter	@1310nm	$9.2\pm 0.4\mu\text{m}$
	@1550nm	$10.4\pm 0.5\mu\text{m}$
Dispersion	@1300 +30/-15nm	$\leq 3.5\text{ps}/(\text{nm}\cdot\text{km})$
	@1550nm	$\leq 18.0\text{ps}/(\text{nm}\cdot\text{km})$
	@1625nm	$\leq 22\text{ps}/(\text{nm}\cdot\text{km})$
Zero-Dispersion wavelength		1300nm ~ 1324nm
Zero-Dispersion slope		$\leq 0.092\text{ps}/(\text{nm}^2\cdot\text{km})$
Cable cutoff wavelength $\lambda_{cc}(\text{nm})$		$\leq 1260\text{nm}$
Cladding diameter		$125\pm 1.0\mu\text{m}$
Cladding non-circularity		$\leq 0.8\%$
Core/cladding concentricity error		$\leq 0.6\mu\text{m}$
Fiber diameter with coating (uncoated)		$245\pm 10\mu\text{m}$
Cladding/coating concentricity error		$\leq 12.0\mu\text{m}$
Proof stress		$\geq 0.69\text{GPa}(100\text{kpsi})$
Dynamic stress corrosion susceptibility parameter (typical value)		≥ 20

Sheath Marking

The outer sheath is marked in 1 meter intervals as follows:

According to customer's requirement

Delivery Lengths

Standard delivery length will be 4km with -1%/+3% tolerance.